




ZN-415-R
BODY ASSEMBLY
WITH "TYPE R" STRAINER

SPECIFICATION SHEET

TAG _____



Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

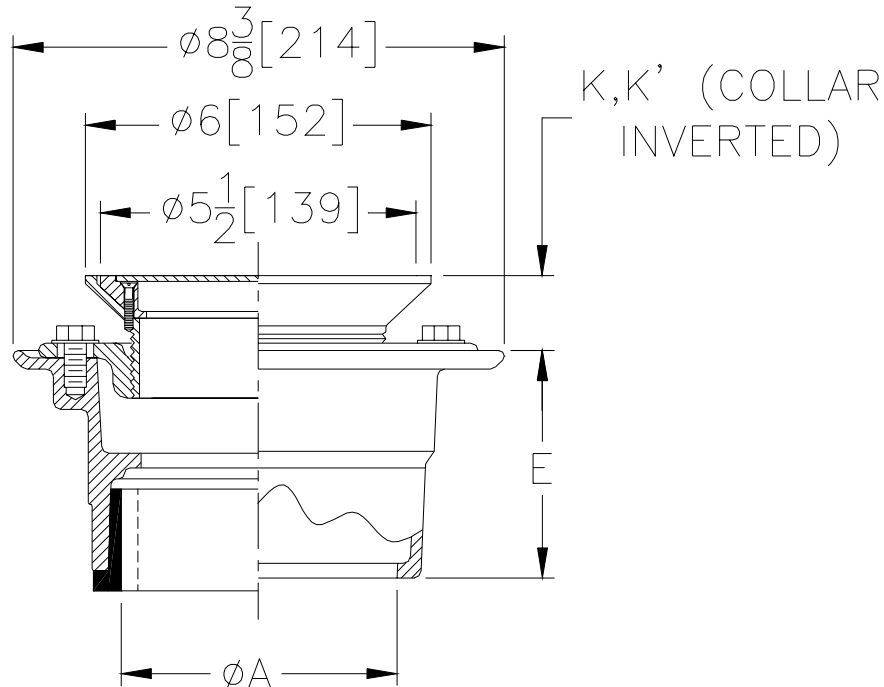

Str. Desig.	Dimensions In Inches / [mm]						Approx. Wt. Lbs. / (kg)	Strainer Open Area Sq. In. / [sq cm]
	A Pipe Size	Str. Dia.	K		K'			
			Min.	Max.	Min.	Max.		
-R6	2-3-4-6 [51-76-102-152]	6 [152]	1-1/8 [29]	2-3/8 [60]	1-3/4 [44]	2-7/8 [73]	11 [5]	8 [52]
-R9	2-3-4-6 [51-76-102-152]	9 [229]	1-3/8 [35]	2-3/8 [60]	1-3/4 [44]	2-7/8 [73]	13 [6]	17 [110]

ENGINEERING SPECIFICATION: ZURN ZN-415 Floor and Shower Drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with "Type R" polished nickel bronze strainer (surface ring and grate).

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2,3,4 [50,75,100]
2,3,4 [50,75,100]
2,3,4,6 [50,75,100,152]
2,3,4 [50,75,100]
2,3,4 [50,75,100]

(Specify size/type) **OUTLET**

_____ IC Inside Caulk
_____ IG Inside Gasket
_____ IP Threaded
_____ NH No-Hub
_____ NL Neo-Loc

E BODY HT. DIM.

3 7/8 [98]
3 7/8 [98]
2 5/8 [67]
3 7/8 [98]
4 5/8 [117]

SUFFIXES

_____ -AR Acid Resistant Epoxy Coated Cast Iron
_____ -FS Floating Slab
_____ -G Galvanized Cast Iron
_____ -P 1/2" [13] Trap Primer Connection
_____ -ST Solid Top (6" [152] only)
_____ -U 1" [25] - 3" [76] High Extension Adapter
_____ -VP Vandal-Proof Secured Top
_____ -X Squeezin Backwater Valve
_____ -Y Sediment Bucket

_____ -414 4" [102] Diameter Nickel Bronze Funnel
_____ -6NH 6" [152] No-Hub Outlet (6IP w/Z-1040)
_____ -90 2" [51], 3" [76] or 4" [102] Side
Outlet Body Assembly (IP or NH only)

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. _____ **DATE:** 11/15/99 **C.N. NO.** 83368

DWG. NO. 63656 **PRODUCT NO.** ZN-415-R