




ZN-415-J

BODY ASSEMBLY WITH "TYPE J" STRAINER

TAG _____



Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

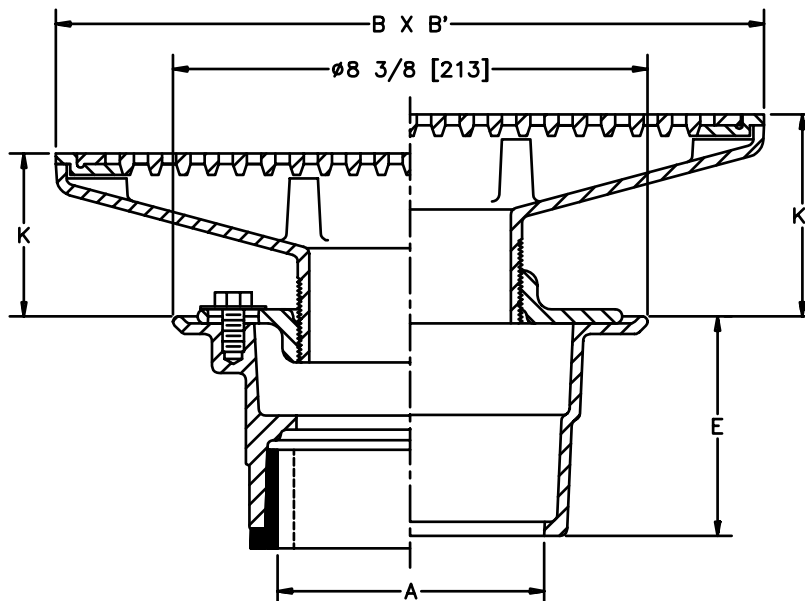

Str. Desig.	Dimensions In Inches / [mm]						Approx. Wt. Lbs. / (kg)	Strainer Open Area Sq. In. / [sq cm]
	A Pipe Size	B x B' Str. Dia.	K		K'			
			Min.	Max.	Min.	Max.		
-J8	2-3-4-6 [51-76-102-152]	4-1/2 x 8 [114 x 203]	1-3/8 [35]	2-5/8 [67]	2-3/8 [60]	3-1/2 [89]	12 [5]	12 [77]

ENGINEERING SPECIFICATION: ZURN ZN-415 Floor and Shower Drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with "TYPE J" polished, nickel bronze rectangular strainer.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2,3,4 [50,75,100]
2,3,4 [50,75,100]
2,3,4,6 [50,75,100,152]
2,3,4 [50,75,100]
2,3,4 [50,75,100]

(Specify size/type) OUTLET

_____ IC Inside Caulk
_____ IG Inside Gasket
_____ IP Threaded
_____ NH No-Hub
_____ NL Neo-Loc

'E' BODY HT. DIM.

3 7/8 [98]
3 7/8 [98]
2 5/8 [67]
3 7/8 [98]
4 5/8 [117]

SUFFIXES

_____ -AR Acid Resistant Epoxy Coated Cast Iron
_____ -G Galvanized Cast Iron
_____ -P 1/2" [13] Trap Primer Connection
_____ -U 1" [25] - 3" [76] High Extension Adapter
_____ -VP Vandal-Proof Secured Top
_____ -X Squeezin Backwater Valve
_____ -Y Sediment Bucket
_____ -6NH 6" [152] No-Hub Outlet (6IP w/Z-1040)
_____ -90 2" [51], 3" [76] or 4" [102] Side
Outlet Body Assembly (IP or NH only)

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. DATE: 11/15/99 C.N. NO. 83465

DWG. NO. 65033 PRODUCT NO. ZN-415-J