


**EZ1™****5" Top Assembly Adjustable Floor Drain with EZ1™ Technology****SPECIFICATION SHEET**

TAG _____

**PATENT
PENDING**

Available Fall 2017

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

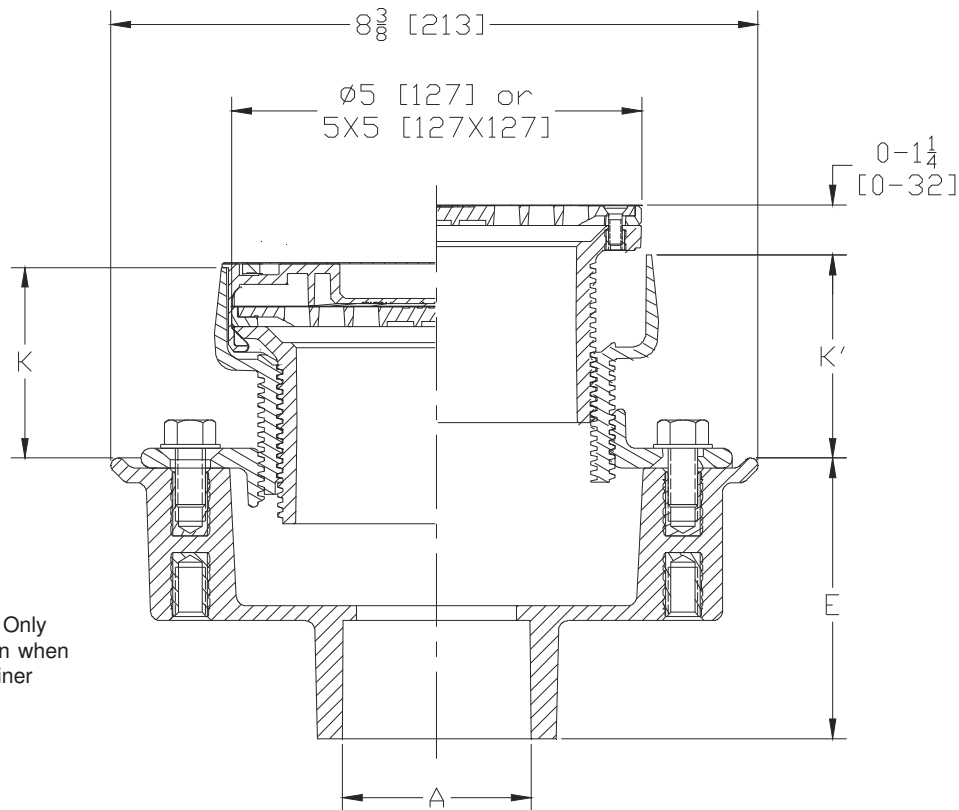

Note:
Minimum K Dimension is Only
Possible with -LR Option when
using Square [152] Strainer

Dimesnions in Inches [mm]								Approx. Wt. Lbs [kg]	Strainer Open Area Sq. In. [cm ²]	Strainer Type
Product Number		A	E	K		K'				
PVC Body	ABS Body	Pipe Size	Body Height	Min	Max	Min	Max			
EZ1-PV2	EZ1-AB2	2-3 [51-76]	2-31/32 [752]	1-1/2 [38]	2-5/8 [66]	2 [51]	3-5/32 [80]	5 [2]	6-1/4 [40]	Nickel Bronze Round
EZ1-PV3	EZ1-AB3	3-4 [76-102]	3-11/16 [94]	1-1/2 [38]	2-5/8 [66]	2 [51]	3-5/32 [80]	5 [2]	6-1/4 [40]	Nickel Bronze Round
EZ1-PV2-ST	EZ1-AB2-ST	2-3 [51-76]	2-31/32 [752]	TBD	TBD	TBD	TBD	TBD	TBD	Nickel Bronze Square
EZ1-PV3-ST	EZ1-AB3-ST	3-4 [76-102]	3-11/16 [94]	TBD	TBD	TBD	TBD	TBD	TBD	Nickel Bronze Square
EZ1-PV2-SS	EZ1-AB2-SS	2-3 [51-76]	2-31/32 [752]	1-1/2 [38]	2-5/8 [66]	2 [51]	3-5/32 [80]	5 [2]	6-1/4 [40]	Stainless Steel Round
EZ1-PV3-SS	EZ1-AB3-SS	3-4 [76-102]	3-11/16 [94]	1-1/2 [38]	2-5/8 [66]	2 [51]	3-5/32 [80]	5 [2]	6-1/4 [40]	Stainless Steel Round
EZ1-PV2-ST-SS	EZ1-AB2-ST-SS	2-3 [51-76]	2-31/32 [752]	TBD	TBD	TBD	TBD	TBD	TBD	Stainless Steel Square
EZ1-PV3-ST-SS	EZ1-AB3-ST-SS	3-4 [76-102]	3-11/16 [94]	TBD	TBD	TBD	TBD	TBD	TBD	Stainless Steel Square

ENGINEERING SPECIFICATION:

Zurn EZ1™ floor and shower drain, PVC or ABS solvent weld body with bottom outlet and 1/2" [13] trap primer connection knock-out plug, combination invertible membrane clamp and adjustable collar with seepage slots and top assembly. EZ1™ drainage series is engineered to simplify product installation, comprised of concrete shield, up to 1-1/4" [32] of vertical post pour adjustment, pre-packaged shims for tilt correction and integrated self-contained square or round light duty strainer in nickel bronze or stainless steel with rough-in cover for protection during concrete pour.

SUFFIXES

___-EF 3/4 [19] Extension Frame	___-TSP Trap Seal Protection Device (Size Matches Drain Outlet Selected) (See Z1072)
___-LR Low Rough-In (For 6 [152] and 8 [203] Strainers Only)	___-U 2 - 3-1/4 [51-83] High Extension Adapter
___-SA Stabilizer Assembly (See Z1035)	___-VP Vandal-Proof Secured Top
___-SQ Stabilizer Q-Deck (See Z1035-Q)	___-Y Sediment Bucket
___-SR Stabilizer Ring	

⚠ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov⚠ **ADVERTENCIA:** Cáncer y daño reproductivo - www.P65Warnings.ca.gov⚠ **AVERTISSEMENT:** Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov**Zurn Industries, LLC | Specification Drainage Operation**

1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929

In Canada | **Zurn Industries Limited**

3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292

www.zurn.com

Rev. B

Date: 06/01/17

C.N. No. 136987

Prod. | Dwg. No. EZ1-5